

AirProjector HIT-KJ-200

Optional Hitachi Projector Accessory for Wireless Presentation




- Easy Operation
- Broadcast Capable
- Versatile
- High Quality Output



Specifications

Product Name	Komatsu TriLink AirProjector
Model	HIT-KJ-200
Standards	IEEE802.11b/g
Network Type	Ad-hoc (Peer to Peer), Infrastructure Mode
Ports	Analog RGB, Serial, Compatible With Hitachi "PJ Man" Software
Power	AC100-120V (50/60 Hz)
System Requirements	Microsoft Windows 98 SE, Me, 2000, XP
Recommended CPU	Intel Pentium 4, 2 GHz or Higher
Memory	256 MB or More Recommended
Supported Resolution	VGA (640x480), SVGA (800x600), XGA (1024x768), SXGA (1280x1024)
Screen Capture Method	Real-Time Video Capture / One-Shot Image Capture
Management	Web Administration and Configuration Using Standard Web Browser (Internet Explorer)
Dimensions	3.15" x 4.72" x 1.18"
Weight	.48 lbs.

Wireless Presentation Solution for Various Applications

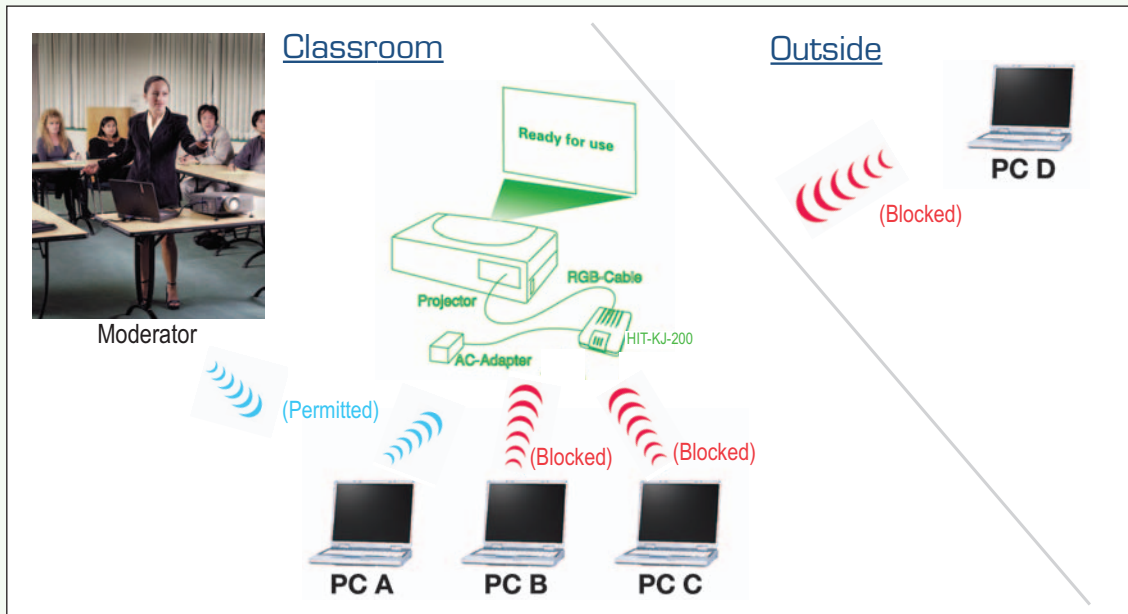

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Specification and product offerings are subject to change without notice
 ©2005 Hitachi America Ltd. Printed in US HIT-KJ-200 07.05